


STEAM AIR HEATERS КП-Ск

Capacity of the air mentioned in the below table is based for the following conditions:	
Inlet air temperature, °C	minus 20
Steam pressure, MPa	0,1

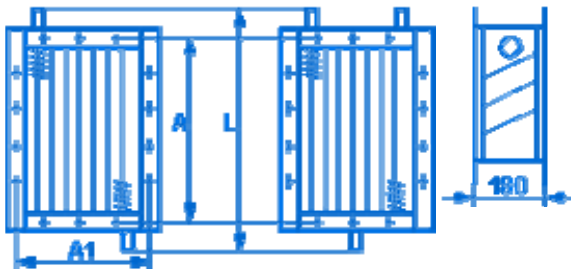

Main technical characteristics of the air heaters КП-Ск										
Brand	Overall dimensions, mm				Capacity		Heat-exchange surface, m ²	Weight, kg		
	A	A ₁	L	Д _у	air throughput, m ³	heat exchange, kW				
КП36-Ск-01 У3Б	578	551	689	50	2500	59,6	13,8	36		
КП37-Ск-01 У3Б	703		814		3150	73,6	17,0	42		
КП38-Ск-01 У3Б	828		939		4000	90,0	20,2	48		
КП39-Ск-01 У3Б	953		1064		5000	107,9	23,4	54		
КП310-Ск-01 У3Б	1203		1314		6300	134,9	29,8	65		
КП311-Ск-01 У3Б	1703	1051	1798	65	16000	358,6	86,4	174		
КП312-Ск-01 У3Б	1703	1551	1798	80	25000	552,3	130,3	257		
КП46-Ск-01 У3Б	578	551	689	50	2500	68,1	18,1	44		
КП47-Ск-01 У3Б	703		814		3150	84,7	22,3	51		
КП48-Ск-01 У3Б	828		939		4000	104,5	26,5	59		
КП49-Ск-01 У3Б	953		1064		5000	126,5	30,8	66		
КП410-Ск-01 У3Б	1203		1314		6300	158,9	39,2	81		
КП411-Ск-01 У3Б	1703		1051		1798	65	16000	424,2	114,5	221
КП412-Ск-01 У3Б	1703		1551		1798	80	25000	656,4	172,9	329

Depth of the air heaters - 180 mm.